

**Compact Industrial Router** 

5G, Four Gigabit Ethernet Ports, Dual SIM, Wi-Fi 5, Cloud Management

# InRouter624

### Embrace 5G to empower enterprise digitalization


- Facing the ever-increasing digitalization of IoT, both application scenarios and terminal devices urgently need to be networked to facilitate the digital transformation of enterprise business, requiring more convenient and efficient networking solutions. InHand launches InRouter624(IR624) series products combined with DeviceLive cloud management service. It is suitable for various industries of the IoT, making your enterprise digitalization more convenient and efficient!
- The IR624 series products are industrial router product that integrates 4G/5G, Wi-Fi, virtual
  private network (VPN) and other technologies. It provides uninterrupted network access
  capabilities, comprehensive security features, and intelligent software services for various
  loT industry applications, providing a secure and reliable business data link for enterprises
  to achieve digital networking.
- The IR624 series products are suitable for the networking of unattended devices and sites. It is embedded with watchdog and multi-layer link detection mechanisms to ensure reliable and stable communications. Meanwhile, combined with the InHand DeviceLive cloud platform, it is easy for enterprise users to conduct unified cloud management centrally, grasp status of devices effortlessly, save deployment costs and improve management efficiency, providing one-stop solutions for your large-scale IoT deployment.

	- SUCCESSION	
n	<b>B</b>	

#### Key industries:

Smart Commerce	<ul> <li>ATM, POS</li> <li>Unattended kiosk</li> <li>Digital signage</li> <li>Retail Stand</li> </ul>				
Smart Energy	<ul> <li>EV Charging</li> <li>Power distribution , Meter reading</li> </ul>				
Smart City	<ul> <li>Heat, Water &amp; air supply</li> <li>Gas supply security; Traffic management、</li> <li>E-police</li> <li>Smart parking</li> </ul>				
Smart Manufacturing	<ul> <li>Networking machines robots</li> <li>Industrial automatic factories &amp; productions lines</li> </ul>				
Smart medical care	<ul> <li>Medical device networking and other applications</li> </ul>				

### Application Case

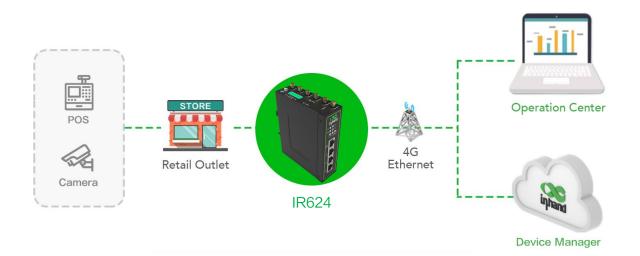

### Features and Advantages

#### Omnipresent and continuous internet access capability: 5G

The IR624 is equipped with 5G cellular access capabilities, fully providing new capabilities and experiences brought by 5G networks. The high bandwidth, low latency and other features make better service.

- Global 5G network access, downstream rate 2Gbps, support SA/NSA networking.
- Gigabit Ethernet, support WAN/LAN/VLAN.
- Maximum bandwidth 1200Mbps, support 802.11 ac/a/b/g/n, 2.4G+5G Wi-Fi dualband.

#### Concise and convenient cloud management

IR624 can access the InHand DeviceLive device management cloud platform. DeviceLive can manage tens of thousands of distributed site devices in real time, and grasp device status anytime and anywhere. At the same time, users can connect to remote devices through cloud services to diagnose, debug and repair the devices, reduce losses caused by device failure, and make management easier, more efficient, and more economical!

# • "Always online", ensuring uninterrupted network

Provides high quality network services that are always online, ensuring the stability of business network, reducing the risk of network malfunction, saving network investment cost.

- Link-backup : enabling wired, cellular and Wi-Fi to make backup mutually;
- Dual SIM failover, automatically switches to the more stable carrier networks;
- Multi-layer detection mechanism : detects link status , realizing automatic re-pull and fault self-recovery

#### Abundant industrial ports, covering IoT scenarios

With rich industrial interfaces, the IR624 can be widely used in highly integrated and diversified IoT scenarios to provide cost effective networking deployment solutions.

- 4 x Gigabit Ethernet port: WAN/LAN/VLAN
- Antennas: 2 x SMA for LTE, 2 x RP–SMA for Wi–Fi
- Industrial serial ports: RS232 & RS485
- 1 x SIM slots (2 x Nano SIM 4FF), 1.8 V/3
   V, eSIM (Optional)

#### • Strong security protection

Security protection is critical in a complex network environment. Multi-level security policies protect sensitive data and key service networks from attacks and threats, providing a secure network to protect digital assets while business advances rapidly.


- Support IPsec VPN and L2TP VPN, ensuring data transmission security.
- Support access control, NAT, port mapping, and firewall filtering based on MAC/IP/port/protocol to protect the network from external attacks.


#### Industrial-grade design

IR624 adheres to the consistent principles of industrial design, maintaining a craftsman's attitude in both product design and component selection, providing high-quality products for unattended IoT sites.

- Support wide temperature and voltage
- Metal shell
- Protection level: IP30
- EMC level: 3
- The Device is compact for saving installation and deployment space.
- Installation method: Din-rail.

### Dimensions(mm)

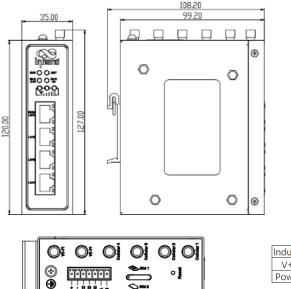



Industrial Terminal							
V+	V-	TXD	RXD	GND	Α	В	
Power	Power supply		RS232			RS485	



# Production Specifications

-lardware Platform						
CPU	580N	ЛНz				
Throughput	450Mbps					
Recommended	50~100					
Users RAM	256MB					
Flash	256MB 128MB					
Interface						
Cellular	5G, downlink rate 2Gbps, Sub6(450MHz to 6GHz), compatible with 4G/3G $$					
Ethernet Port	4*10/100/1000Mbps, Ethernet, WAN/LAN/VLAN 1.5KV network isolation transformer protection					
Power Supply	DC9 indus	DC9–36V, over-current protection, anti-reverse connection, 2 PIN industrial terminal				
Serial Port	1xR	S232 and 1 x RS48	5			
Reset	Rese	et button				
SIM Card		rawer–type slot, su 1 (Optional)	pport dual-NAN(	SIN	I, 1.8 V/3 V	
Antenna Interface	4×S	MA for 5G or 2 x SN	/IA for 4G , 2 x RP	P-SM	A for Wi–Fi	
Ground Terminal	Supp	ports				
Indicator	1xS	ystem, 1 x Cellular, <sup>.</sup>	1×2.4G Wi–Fi,1>	x 5G \	Ni−Fi,3x Signal	
Hardware compone	ents					
RTC	Sup	port				
Wi-Fi						
Dual Radio		5GHz Wi-Fi				
Transmission Bandwidth		867 Mbps 3: 300 Mbps				
Protocol	802	.11 ac/a/b/g/n Wave	2MU-MIMO			
Maximum Transmit Power		17dBm G: 17dBm				
Transmission Distance		eters by line of sigh ual transmission dis				
-			tance depends o	nenv	rironment of the site.)	
Mechanical Feature			tance depends o	nenv	rironment of the site.)	
Mechanical Feature	es	x108.2x35mm	Weight	nenv	-	
Mechanical Feature Dimensions Installation	es 127: Din-	<108.2x 35mm -rail	Weight Protection Rati		- IP30	
Mechanical Feature Dimensions Installation Housing	es 127)	<108.2x 35mm -rail	Weight		-	
Mechanical Feature Dimensions Installation Housing Power rate	es 127: Din-	<108.2x 35mm -rail	Weight Protection Rati		- IP30	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power	es 127: Din-	<108.2x 35mm -rail	Weight Protection Rati		- IP30	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power	es 127: Din-	<108.2x 35mm -rail	Weight Protection Rati		- IP30	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power	<ul> <li>127;</li> <li>Din-</li> <li>Meta</li> <li>-</li> <li>-</li> <li>-</li> </ul>	<108.2x 35mm -rail	Weight Protection Rati		- IP30	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power	<ul> <li>127;</li> <li>Din-</li> <li>Meta</li> <li>-</li> <li>-</li> <li>-</li> </ul>	<108.2x 35mm -rail	Weight Protection Rati		- IP30	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature	255 1273 Din- Meta - - - - - - - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C	Weight Protection Ratii Cooling Operating Temperature	ng	- IP30	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity	255 1273 Din- Meta - - - - - - - - - - - - - - - - - - -	<108.2x 35mm -rail al	Weight Protection Ratii Cooling Operating Temperature	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature	255 1273 Din- Meta - - - - - - - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C	Weight Protection Ratii Cooling Operating Temperature	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity	255 1273 Din- Meta - - - - - - - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C	Weight Protection Ratii Cooling Operating Temperature	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity EMC	es 127; Din- Meta - - - - - - - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C 5% (no condensing)	Weight Protection Ratii Cooling Operating Temperature	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity EMC Static	es 127; Din- Meta - - - - - - - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C 5% (no condensing) EN61000-4-2, lev	Weight Protection Ratii Cooling Operating Temperature vel 3 vel 3	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Peak Power Ambient Environme Storage Character Ambient Humidity EMC Static Radiation Electric Fiel Pulsed Electric Field Surge	225 1273 Din- Meta - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C 5% (no condensing) EN61000-4-2, lev EN61000-4-3, lev	Weight Protection Ratii Cooling Operating Temperature vel 3 vel 3 vel 3	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Peak Power Ambient Environme Storage Temperature Storage Temperature Static Static Radiation Electric Fiel	225 1273 Din- Meta - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C 5% (no condensing) EN61000-4-2, lev EN61000-4-3, lev EN61000-4-4, lev	Weight Protection Ratii Cooling Operating Temperature vel 3 vel 3 vel 3 vel 3	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity EMC Static Radiation Electric Fiel Pulsed Electric Field Surge Conducted Disturba	295 1273 Din- Meta - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C 5% (no condensing) EN61000-4-2, lev EN61000-4-3, lev EN61000-4-5, lev	Weight Protection Rati Cooling Operating Temperature vel 3 vel 3 vel 3 vel 3 vel 3	ng	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity EMC Static Radiation Electric Fiel Pulsed Electric Field Surge Conducted Disturba	295 1273 Din- Meta - - - - - - - - - - - - -	<108.2x 35mm -rail al ~85°C 5% (no condensing) EN61000-4-2, lev EN61000-4-3, lev EN61000-4-6, lev EN61000-4-6, lev	Weight Protection Ratii Cooling Operating Temperature vel 3 vel 3 vel 3 vel 3 vel 3 vel 3 vel 3	ng -2(	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity EMC Static Radiation Electric Fiel Static Radiation Electric Field Surge Conducted Disturba Immunity Shock Wave Resista Power Frequency	295 1273 Din- Meta - - - - - - - - - - - - -	<108.2x 35mm -rail al ~ 85°C 5% (no condensing) EN61000-4-2, lev EN61000-4-3, lev EN61000-4-5, lev EN61000-4-6, lev EN61000-4-6, lev	Weight Protection Ratii Cooling Operating Temperature vel 3 vel 3 vel 3 vel 3 vel 3 vel 3 vel 3	ng -2(	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity EMC Static Radiation Electric Fiel Pulsed Electric Field Surge Conducted Disturba Immunity Shock Wave Resista Power Frequency Magnetic Field Resistance	227) 127) Din- Meta	<108.2x 35mm -rail al ~ 85°C 5% (no condensing) EN61000-4-2, lev EN61000-4-3, lev EN61000-4-5, lev EN61000-4-6, lev EN61000-4-6, lev	Weight Protection Ratii Cooling Operating Temperature vel 3 vel 3 vel 3 vel 3 vel 3 vel 3 vel 3	ng -2(	- IP30 Fanless	
Mechanical Feature Dimensions Installation Housing Power rate Standby Power Working Power Peak Power Ambient Environme Storage Temperature Ambient Humidity EMC Static Radiation Electric Fiel Pulsed Electric Field Surge Conducted Disturba Immunity Shock Wave Resistar Power Frequency Magnetic Field Resistance Physical Specs	295 1273 Din- Meta - - - - - - - - - - - - -	<108.2x 35mm -rail al ~85°C 5% (no condensing) EN61000-4-2, lev EN61000-4-3, lev EN61000-4-6, lev EN61000-4-6, lev EN61000-4-6, lev EN61000-4-8, hc	Weight Protection Rati Cooling Operating Temperature vel 3 vel 3	ng -2(	- IP30 Fanless D~ 70°C	

InRouter624 Softwar	e Specifications
Network Connection	
Network Access	APN, VPDN
Access Authentication	СНАР/РАР
Network Type	WCDMA, TDD LTE/FDD LTE, 5G NR(SA/NSA) (Please refer to the Ordering Guide for frequencies)
LAN Protocol	ARP, Ethernet
WAN Protocol	Static IP, DHCP, PPPoE
Network Protocol	
Protocol & Application	TCP、UDP、IPv4、ICMP、NTP、DNS、HTTP、HTTPS、SSL/TLS、ARP、 VRRP、PPP、PPPoE、SSH、DHCP Server、DHCP Relay、DHCP Client、 DDNS、Telnet、IP Passthrough
Routing	Static routing
Security	
Network Security	Support access control, NAT, port mapping and firewall filtering based on MAC/IP/port/protocol Support policy routing
Data Security	IPsec VPN, L2TP VPN
Reliability	
Backup	Interface backup
Dual SIM Failover	Supports dual SIM failover
Link Detection	Sends heartbeat packets to detect, auto redials when disconnected
Embedded Watchdog	Device runs self-detection, auto recovers from malfunctions
Wi-Fi	
Working Mode	AP, Client
Security	Open system, shared key, WPA/WPA2 certification WEP/TKIP/AES encryption
Wi-Fi Portal	Support
Intelligence	
DTU Functions	TCP / UDP transparent transmission mode Supports conversion of Modbus RTU to Modbus TCP bridge
Monitoring & Alerting	I
Dash Board	Device information, interface status, and refined traffic statistics
Link Monitoring	Link delay, jitter, packet loss, and throughput
Log & Alarm	System logs, diagnostic logs, device events
QoS	
Traffic Shaping	Support
Remote maintenance	9
Remote Access	Support Web/CLI remote access
Cloud Management	DeviceLive supports batch management, equipment monitoring, remote maintenance
Network Diagnostics	Support Ping, Traceroute and network packet capture tools
Configuration Backup	Support configuration import and export



# Ordering Guide

Model code: IR624- <wmnn>-<wlan na="">-<s na="">-<g na=""></g></s></wlan></wmnn>					
Model	<wmnn>: Cellular Type &amp; Module</wmnn>	<wlan na="">: Wi-Fi</wlan>	<s na="">: Serial/IO</s>		
IR624-NRF2- <wlan na="">-<s na=""></s></wlan>	(For China 5G) 5G NR: n1/3/5/8/28/41/78/79 LTE FDD: 81/3/5/7*/8 LTE TDD: B34/38/39/40/41 WCDMA: B1/5/8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: no serial port</na>		
IR624-NRF5- <wlan na="">-<s na=""></s></wlan>	(For Europe 5G) 5G NR: n1/3/5/7/8/20/28/38/40/41/71/77/78 LTE FDD: B1/3/5/7/8/20/28/71 LTE TDD: B38/40/41 WCDMA: B1/5/8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: no serial port</na>		

Example: IR624-NRF2-WLAN: Four Gigabit Ethernet ports IR624 series cellular router with Wi-Fi, support IPSec VPN and L2TP VPN. Note: the product comes standard with suction cup antenna and Din-rail accessories.

## About Us

InHand Networks is a global leader of Industrial IoT, with a record of tremendous success following groundbreaking innovation since our inception in 2001.

InHand serves world-class partners and customers with industrial M2M routers, gateways, industrial Ethernet switches, rugged computers and IoT management platforms. We provide IoT solutions for various vertical markets including Smart Grid, Industrial Automation, Remote Machine Monitoring, Smart Vending, Smart City, Retail and more.

Proudly bearing the marks of both Rockwell Automation Technology Partner in Asia-Pacific and Schneider Electric Technology Partner, InHand Networks defines industrial innovation and reliability.



43671 Trade Center Place, Suite 100, Dulles, VA 20166 USA T: +1 (703) 348-2988 E: info@inhandnetworks.com www.inhandnetworks.com